

LEAF SPRING

SUSPENSION AXLES

MEDIUM DUTY
9,000 - 15,000 LBS. CAPACITY

Date: _____ Account # _____

Account Name: _____

Contact Person: _____

Phone: () _____

Customer Signature: _____

Capacity: _____ Quantity: _____

Hub Face: _____ Track Width: _____ Spring Center: _____

Axle Type: Beam only Idler Brake Axle

Bearing Lubrication:

Grease Oil

Brake Type:

Electric Single-Servo Hydraulic
Disc Hydraulic (10k & 12K) Duo-Servo Hydraulic
(Standard Hyd. Drum)

Park (hydraulic only):

Air Brake (options):

Chambers:

Type 20 (10K-12K) Type 30 (15K) Type 20/24 (10K-12K)

Type 30/30 (15K) No Chambers

Mounted for 20/24 & 30/30

Slacks:

Manual Adjust Automatic Adjust No Slacks

Cam Length:

Standard Length Length: _____

ABS (Air & Hydraulic)

Wheel Bolt Pattern: *8 on 6.50 (9K, 10K & 12K)

*8-275mm (15K)

Whee Nuts: 5/8" Flgd 5/8" Coned/Clamp Ring (standard)

Pre-wired: Yes No (standard)

Spring Seats: Under Axle Over Axle Loose NONE

Spring Type: Slipper HDSS Suspension No Springs

Spring Capacity: _____

Adjustable Suspension: Yes No

Painted: Yes No


Notes: _____

IN CASE OF CUSTOMER ERROR:


Dexter builds axles to order per customer specifications. Please be sure all dimensions and specifications are correct. Axles are subject to a 50% restock fee if returned & the customer is responsible for all freight charges incurred for the original shipment & return. Some combinations may not work pending on options chosen or may not apply.




Straight Axle

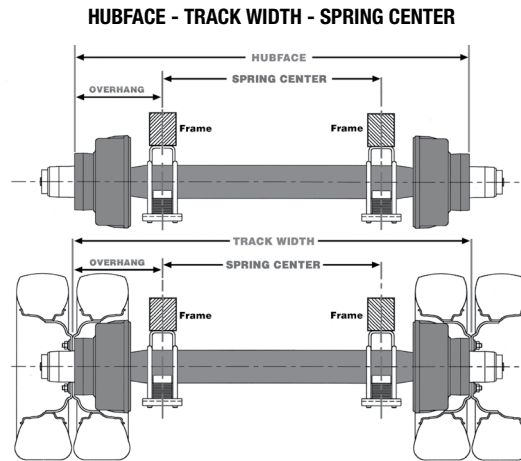


Wheel Offset

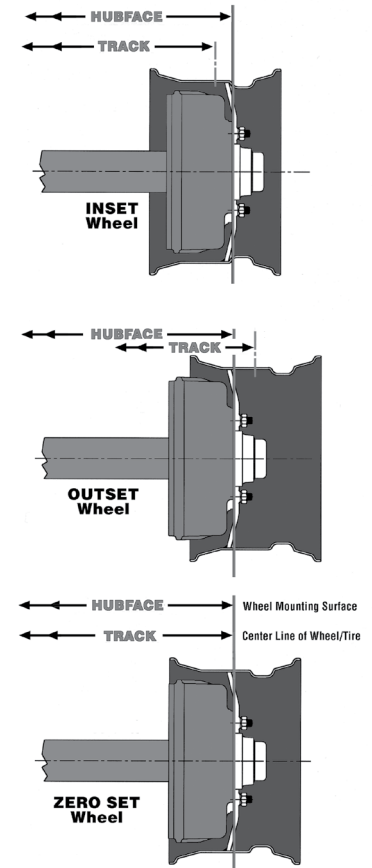


Spring Position

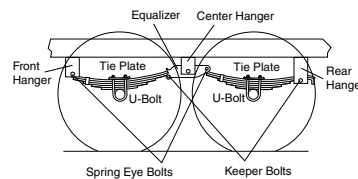

Spring Type

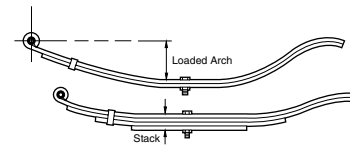

Axle Spacing

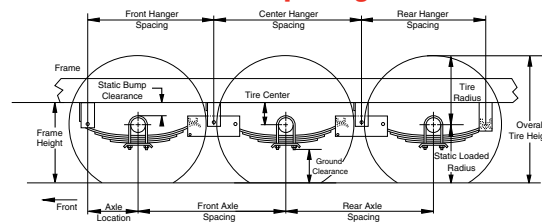

Dexter carries a full line of hanger and attaching parts for mounting your axle.

Albion, IN Fax: (260)-636-5387 or E-mail:

Elkhart, IN Fax: (574)-293-7093 or E-mail:

Fremont, IN Fax: (260)-495-1701 or E-mail:

El Reno, OK Fax: (405)-262-9089 or E-mail:

Monticello, GA Fax: (706)-468-2966 or E-mail:

Shawnee, OK Fax: (405)-273-9979 or E-mail:

